



TD-L

EN

*Light mower for mulching grass
and branches up to 6 cm*

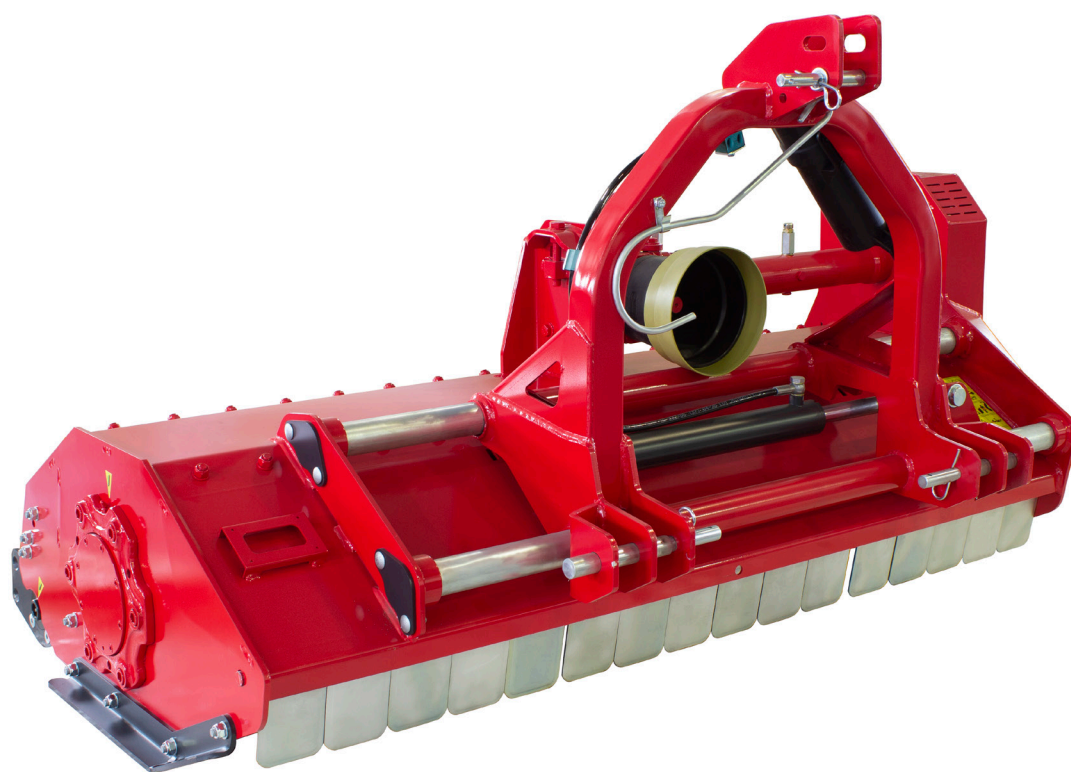

VITI



SETO



ARBO



HORTI




DAVID
SMART FARMING SOLUTIONS

SERIE TD-L



Light mower for mulching grass and branches up to 6 cm. Made of high quality steel and having low power consumption, the reliability and robustness are key points.

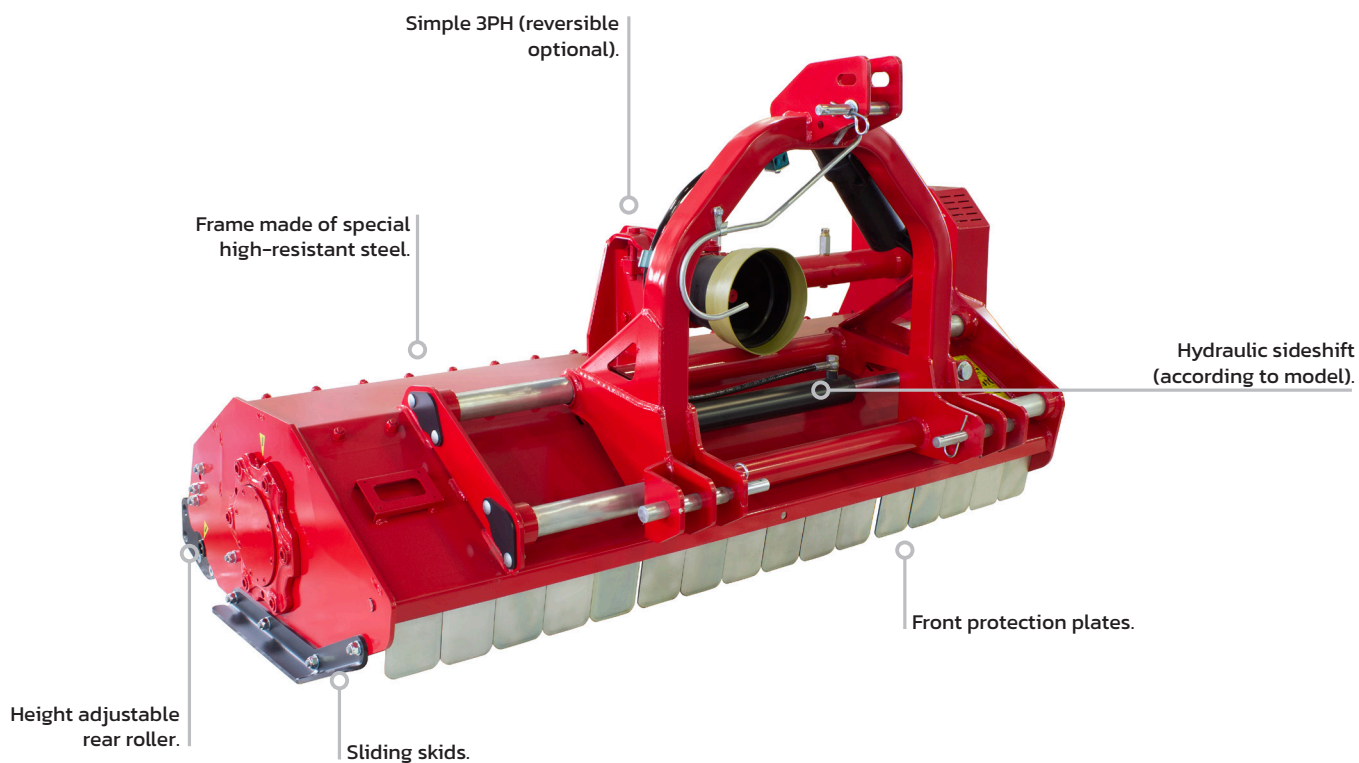

PICTURE MODEL:
TD-L-160



Versatility

- Models adjustable to any kind of plantation system.
- Possibility of simultaneous use with sweeper.
- Its central rotor can be equipped with knives or hammers.

Exclusivity

- Equipment built with high elastic limit steels and anti-wear qualities.
- Includes DS system for quick change of gearbox input speed from 540 rpm to 1000 rpm by reversing the pulleys.

Effectiveness

- High working speed.
- All models are fitted with slides and a rear roller for a perfect ground adaptation.

Reliability

- We use the latest generation materials to avoid cracks and crevices and able to withstand at highest load limit.
- Features a paddle cooling system integrated into the pulley to ventilate and remove heat generated by belt friction.

Safety






- All models are designed for simple and intuitives operations.
- Lubrication points protected from shocks.
- Gearbox with internal freewheel.
- All models include front guards to prevent rock throwing.

Sustainability

- The low power required allows the use of small tractors with a lower carbon footprint.
- Sustainable consumption: Equipment designed to be up-to-date and have a long service life.
- Mowing pruned branches improves soil quality by providing nutrients and reduce the emission of CO2 that occurs during combustion.


Standard Equipment


- Transmission driven by belts (XPB).
- Front protection plates.
- Hydraulic sideshift except on Mod. TDL 120F & TDL 140 F.
- Gearbox with free wheel (1³/₈ - Z6).
- Replaceable counter-blades.
- Rotor Ø384 with oscillating hammers and Ø20 mm screws.
- Sliding skirts.
- Rear roller adjustable in height.
- Simple coupling head.
- Detachable rear tines.
- PTO Bondioli G5.
- Scraper for roller.

					HAMMER 
TD-L	m	n°	kg	HP	REF.
FIXED	1,20	18	364	45-60	TD-L-120-F
	1,40	22	398	50-60	TD-L-140-F
SIDE SHIFT	1,60	26	478	55-60	TD-L-160
	1,80	28	494	65-90	TD-L-180
	2,00	32	529	70-90	TD-L-200









Technical details

			L	W	H
TD-L	REF.	mm	m	m	m
FIXED	TD-L-120	600-600	1,42	1,05	1,05
	TD-L-140	700-700	1,62	1,05	1,05
SIDE SHIFT	TD-L-160	869-1.130	1,82	1,05	1,05
	TD-L-180	869-1.330	2,02	1,05	1,05
	TD-L-200	869-1.530	2,22	1,05	1,05

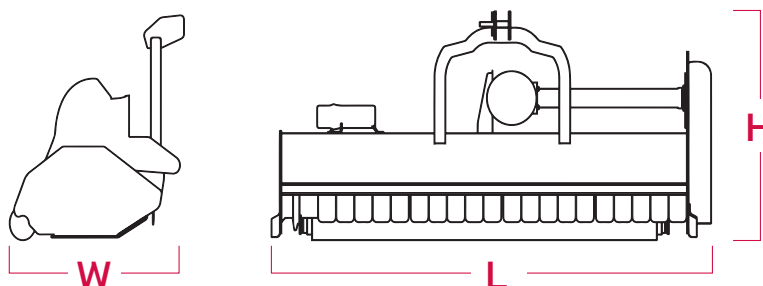

Mower Accessories and Options

	DESCRIPTION	OBSERVATIONS	REF.
	Double free wheel and double head Group		TGDR-1
		TDL-120	PRT1-12
		TDL-140	PRT1-14
	Rear branch retainer kit	TDL-160	PRT1-16
		TDL-180	PRT1-18
		TDL-200	PRT1-20
	Rotary mower retractable by spring	Ø600 Blades	GSM6-C-D
		Ø800 Blades	GSM8-C-D
		Ø600 strings	GSM6-H-D
		Ø800 Strings	GSM8-H-D
	Packaging	Basic	EMB-1
		Airfreight- oceanfreight	EMB-2

The value of ideas

Experience, technology, know-how and design are the fundamentals to achieving our goal: the support and full satisfaction of the farmer. Being excellent in everything we do is our guiding light.



INDUSTRIAS DAVID S.L.U.
C/ Médico Miguel Lucas s/n
CP: 30510, Yecla, Murcia-Spain
Tel.: +34 968 718 119
info@id-david.com

Connect with us.
[instagram.com/iddavid_official](https://www.instagram.com/iddavid_official)
twitter.com/IDdavidslu
[facebook.com/industriasdavid](https://www.facebook.com/industriasdavid)
[linkedin.com/company/id-david](https://www.linkedin.com/company/id-david)
[youtube.com/industriasdavid](https://www.youtube.com/industriasdavid)

www.id-david.com

