

# ID-ROLL

EN

*Reversible frame with fingerhoe and star roller*

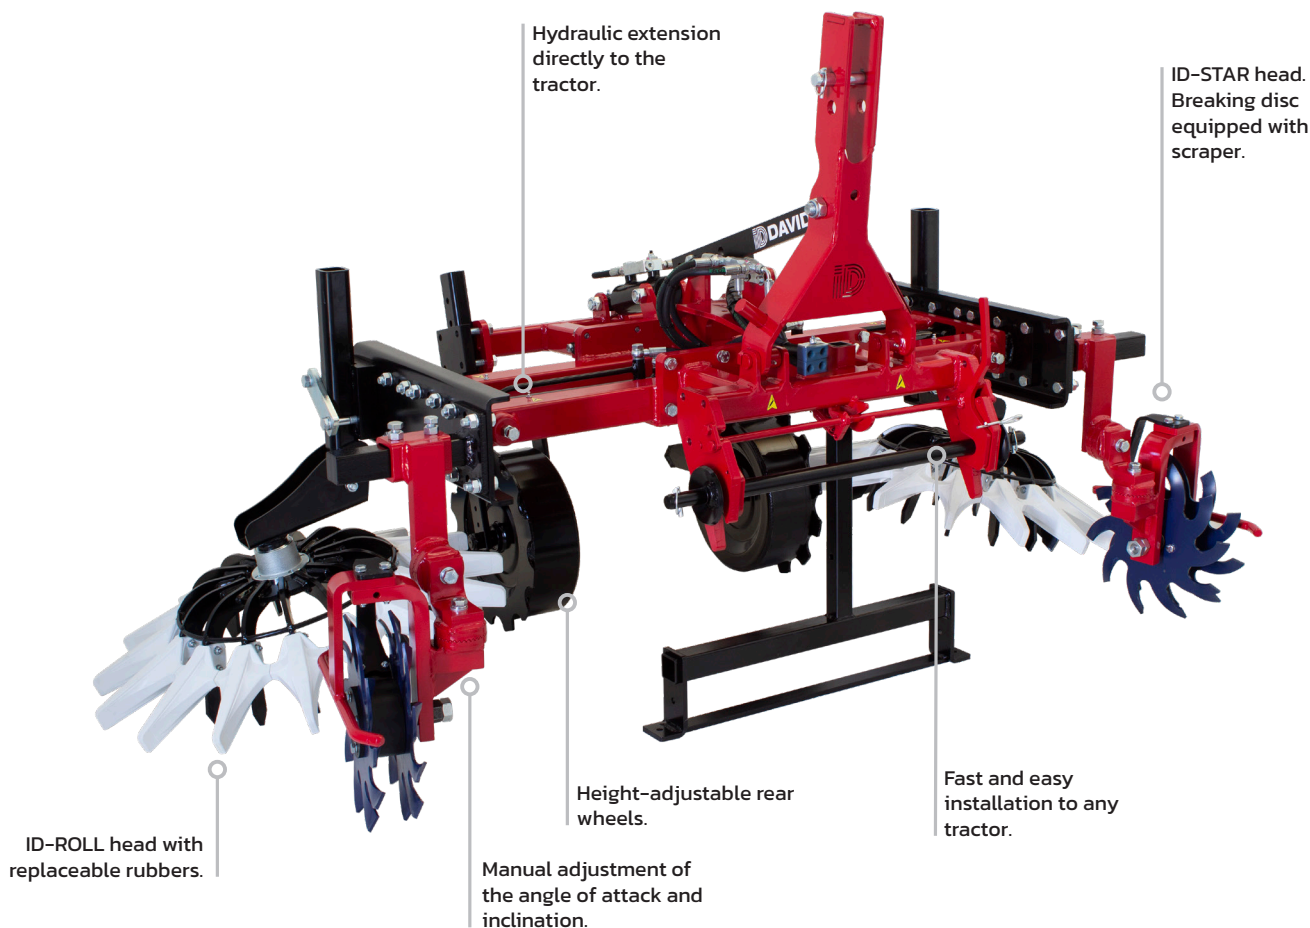


SERIE

# ID-ROLL



**Reversible frame with fingerhoe and star roller.** Design for a perfect elimination of small weeds between plants formed in rows.



PICTURE MODEL:  
ROLL-M-P + CRA-DT



## Versatility

- Complete range. A configuration according to your needs.

## Exclusivity

- Rubber fingers can be replaced individually. Different formats are available depending on the soil type.

## Effectiveness

- Working speeds up to 20 km/h.
- Sustainable consumption: Equipment designed to be up-to-date and have a long service life.

## Reliability

- Heavy duty frame and robotic welding.
- Components and materials of high quality from certified manufacturers.
- Head built in Hardox.

## Safety



- All models are designed for a safe, simple and intuitive use.
- Maximum protection in plants from 2 years old.



## Sustainability

- Ecological alternative to the use of herbicides.
- Our painting is lead-free and without toxic pigments.
- Improves the structure and porosity of the soil.

## Standard Equipment

- Reversible chassis for use in front and rear 3rd point.
- Hydraulic width adjusting to the tractor.
- Adjustable pair of metal wheels in height and width.
- Storage foot.
- Quick coupling.
- ID-ROLL equipped with replaceable tips.
- ID-STAR 2 or 3 rollbreakers discs (depending on model).

|                                                                                   |                                                                                    |  |  |  |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                                                                                   | <b>ID-ROLL</b>                                                                     | m                                                                                 | REF.                                                                              | REF.                                                                                |
|  | <b>RIGHT</b>                                                                       | $\geq 2,00$                                                                       | ROLL-S2-D                                                                         | ROLL-S3-D                                                                           |
|                                                                                   |   | $\geq 2,40$                                                                       | ROLL-M2-D                                                                         | ROLL-M3-D                                                                           |
|                                                                                   |                                                                                    | $\geq 2,80$                                                                       | ROLL-L2-D                                                                         | ROLL-L3-D                                                                           |
|                                                                                   | <b>PAIR</b>                                                                        | 2,00-2,60                                                                         | ROLL-S2-P                                                                         | ROLL-S3-P                                                                           |
|                                                                                   |  | 2,60-3,15                                                                         | ROLL-M2-P                                                                         | ROLL-M3-P                                                                           |
|                                                                                   |                                                                                    | 3,15-4,05                                                                         | ROLL-L2-P                                                                         | ROLL-L3-P                                                                           |


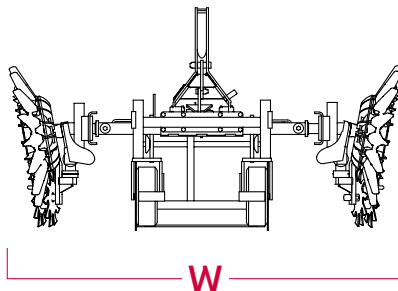
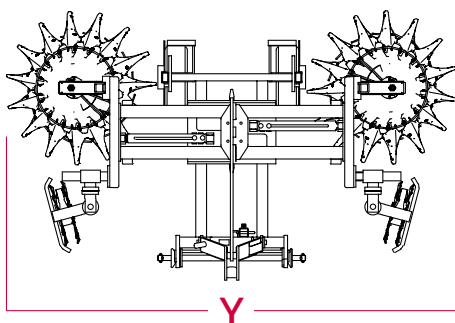
|                                                                                     |                                                                                     |             |             |             |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------|-------------|-------------|
|  | <b>RIGHT</b>                                                                        | $\geq 1,80$ | ROLL-6-S2-D | ROLL-6-S3-D |
|                                                                                     |  | $\geq 2,20$ | ROLL-6-M2-D | ROLL-6-M3-D |
|                                                                                     |                                                                                     | $\geq 2,60$ | ROLL-6-L2-D | ROLL-6-L3-D |
|                                                                                     | <b>PAIR</b>                                                                         | 1,80-2,35   | ROLL-6-S2-P | ROLL-6-S3-P |
|                                                                                     |  | 2,35-2,90   | ROLL-6-M2-P | ROLL-6-M3-P |
|                                                                                     |                                                                                     | 2,90-3,80   | ROLL-6-L2-P | ROLL-6-L3-P |



## Technical details

|                                                                                   | ID-ROLL      | REF.     | Y         |  |  | L    | W    | H    |
|-----------------------------------------------------------------------------------|--------------|----------|-----------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|------|------|------|
|                                                                                   |              |          | m         | kg                                                                                | HP                                                                                  | m    | m    | m    |
|  | <b>RIGHT</b> | ROLL-S-D | ≥ 2,00    | 290                                                                               | 30                                                                                  | 1,40 | 1,20 | 1,35 |
|                                                                                   |              | ROLL-M-D | ≥ 2,40    | 300                                                                               | 35                                                                                  | 1,40 | 1,75 | 1,35 |
|                                                                                   |              | ROLL-L-D | ≥ 2,80    | 310                                                                               | 40                                                                                  | 1,40 | 2,30 | 1,35 |
|                                                                                   | <b>PAIR</b>  | ROLL-S-P | 1,90-2,55 | 350                                                                               | 35                                                                                  | 1,40 | 1,88 | 1,35 |
|                                                                                   |              | ROLL-M-P | 2,50-3,15 | 365                                                                               | 40                                                                                  | 1,40 | 2,30 | 1,35 |
|                                                                                   |              | ROLL-L-P | 3,05-4,05 | 380                                                                               | 45                                                                                  | 1,40 | 2,84 | 1,35 |




|                                                                                   |              |           |           |     |    |      |      |      |
|-----------------------------------------------------------------------------------|--------------|-----------|-----------|-----|----|------|------|------|
|  | <b>RIGHT</b> | ROLL-6S-D | ≥ 1,80    | 260 | 30 | 1,20 | 1,15 | 1,35 |
|                                                                                   |              | ROLL-6M-D | ≥ 2,20    | 270 | 35 | 1,20 | 1,70 | 1,35 |
|                                                                                   |              | ROLL-6L-D | ≥ 2,60    | 280 | 40 | 1,20 | 2,25 | 1,35 |
|                                                                                   | <b>PAIR</b>  | ROLL-6S-P | 1,70-2,35 | 320 | 35 | 1,20 | 1,58 | 1,35 |
|                                                                                   |              | ROLL-6M-P | 2,25-2,90 | 335 | 40 | 1,20 | 2,00 | 1,35 |
|                                                                                   |              | ROLL-6L-P | 2,80-3,80 | 350 | 45 | 1,20 | 2,54 | 1,35 |






## Tractor mounting



## Drawbar

|                                                        |        |                                                                                         |                                                                                          |                                                                                           |
|--------------------------------------------------------|--------|-----------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|
| <b>S</b> Standard<br>• Optional<br>(Replaces standard) |        | Ø22  | Ø28  | Ø28  |
|                                                        |        | REF.<br>BE-2271                                                                         | STANDARD                                                                                 | REF.<br>BE-2887                                                                           |
| <b>ID-ROLL</b>                                         | ROLL-S | •                                                                                       | S                                                                                        | •                                                                                         |
|                                                        | ROLL-M | •                                                                                       | S                                                                                        | •                                                                                         |
|                                                        | ROLL-L | •                                                                                       | S                                                                                        | •                                                                                         |



## Tractor connection and assembling

|                                                                                     |                                                                                     |                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |
| STANDARD                                                                            | REF.<br>CMT-10                                                                      | REF.<br>CMT-5                                                                         |

\* 3PH and tractor assembly plate not included.

## Chassis

### Accessories and Options

|                                                                                    | DESCRIPTION                                                                                    |                                                                                   | OBSERVATIONS                             | REF.      |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------|-----------|
|    | Hydraulic adjustment of working height                                                         |  | Directly to the tractor<br>New equipment | CRA-DT-1  |
|    | Three-point with tilting system<br>*Replace the standard one<br>(Inclination: +10°, -10°)      |                                                                                   | New equipment                            | TSB-01    |
|    | Hydraulic inclination ID-ROLL<br>*Increases working width of 10 cm<br>Inclination: + 21°, -10° |  | Directly to the tractor<br>Unit          | IH-DT     |
|    | ID-STAR 2 discs rotary star tiller                                                             |                                                                                   |                                          | ID-ST2-D  |
|                                                                                    | ID-STAR 3 discs rotary star tiller                                                             | Right                                                                             |                                          | ID-ST3-D  |
|                                                                                    | Extra price ID-STAR (3rd disc)                                                                 |                                                                                   |                                          | ID-ST23-D |
|    | ID-STAR 2 discs rotary star tiller                                                             |                                                                                   |                                          | ID-ST2-P  |
|                                                                                    | ID-STAR 3 discs rotary star tiller                                                             | Pair                                                                              |                                          | ID-ST3-P  |
|                                                                                    | Extra price ID-STAR (3rd disc)                                                                 |                                                                                   |                                          | ID-ST23-P |
|  | Over full plate extension                                                                      | 120 mm                                                                            |                                          | SEC-12    |
|                                                                                    |                                                                                                | 200 mm                                                                            |                                          | SEC-20    |
|  | 2 mechanical disc harrow                                                                       | Ø16" Working with a max. width of 400mm                                           | Right                                    | ADCV2D    |
|                                                                                    | 2 mechanical disc harrow                                                                       |                                                                                   | Pair                                     | ADCV2P    |
|  | 3 mechanical disc harrow                                                                       | Ø16" Working with a max. width of 550mm                                           | Right                                    | ADCV3D    |
|                                                                                    | 3 mechanical disc harrow                                                                       |                                                                                   | Pair                                     | ADCV3P    |
|  | Kit ID-ROLL Ø600                                                                               | Right                                                                             |                                          | KCAB-R6-D |
|                                                                                    | Kit ID-ROLL Ø850                                                                               |                                                                                   |                                          | KCAB-R8-D |
|                                                                                    | Kit ID-ROLL Ø600                                                                               | Pair                                                                              |                                          | KCAB-R6-P |
|                                                                                    | Kit ID-ROLL Ø850                                                                               |                                                                                   |                                          | KCAB-R8-P |
|  | ID ROLL narrowing kit                                                                          | 13,5 cm Narrow                                                                    | Right                                    | KEROLL-D  |
|                                                                                    |                                                                                                | 27 cm Narrow                                                                      | Pair                                     | KEROLL-P  |
|  | Packaging                                                                                      | Basic                                                                             |                                          | EMB-1     |
|                                                                                    |                                                                                                | Airfreight- oceanfreight                                                          |                                          | EMB-3     |



**Ideal products and services that inspire trust,  
quality, experience and excellence**

Specialized and customized agricultural machines with an attractive design and increasing digitalizations. Our products are oriented towards a biological, environment-friendly and precision farming.



**INDUSTRIAS DAVID S.L.U.**  
C/ Médico Miguel Lucas s/n  
CP: 30510, Yecla, Murcia-Spain  
Tel.: +34 968 718 119  
[info@id-david.com](mailto:info@id-david.com)

**Connect with us.**  
[instagram.com/iddavid\\_official](https://www.instagram.com/iddavid_official)  
[twitter.com/IDdavidslu](https://twitter.com/IDdavidslu)  
[facebook.com/industriasdavid](https://facebook.com/industriasdavid)  
[linkedin.com/company/id-david](https://linkedin.com/company/id-david)  
[youtube.com/industriasdavid](https://youtube.com/industriasdavid)

[www.id-david.com](http://www.id-david.com)

